

# SIOV metal oxide varistors

Leaded varistors, AdvanceD series

Series/Type: B722\*

Date: April 2017

© EPCOS AG 2017. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



Leaded varistors B722<sup>o</sup>

#### AdvanceD series

#### Construction

- Round varistor element, leaded
- Coating: epoxy resin, flame-retardant to UL 94 V-0

#### **Features**

- High-energy AdvanceD series E2
- High surge current ratings up to 10 kA
- High energy ratings up to 440 J
- Wide operating voltage range 130 ... 680 V<sub>BMS</sub>
- For S14/ S20 types duty cycle @ 6 kV/ 3 kA = >10 pulses, according to IEC 60950-1, Annex Q; IEC 61051-2
- PSpice models

#### **Approvals**

- UL
- CSA
- VDF
- CQC S05/07 (K11 ... K460), S10/S14 (K11 ... K680), S20 (K11 ... K1000)
- **IEC**

#### **Delivery mode**

- Bulk (standard), taped versions on reel or in Ammo pack upon request.
- For further details refer chapter "Taping, packaging and lead configuration" for leaded varistors.

#### General technical data

Climatic category	to IEC 60068-1	40/105/56	
Operating temperature	to IEC 61051	-40 +105	°C
Storage temperature		-40 +125	°C
Electric strength	to IEC 61051	≥ 2.5	kV <sub>RMS</sub>
Insulation resistance	to IEC 61051	≥ 100	$M\Omega$
Response time		< 25	ns



### AdvanceD series



# Electrical specifications and ordering codes Maximum ratings ( $T_A$ = 85 °C)

Ordering code	Туре	$V_{RMS}$	V <sub>DC</sub>	i <sub>max</sub>	W <sub>max</sub>	P <sub>max</sub>
	(untaped)			(8/20 µs)	(2 ms)	
	SIOV-	V	V	Α	J	W
V <sub>RMS</sub> = 130 V						
B72205S2131K101	S05K130E2	130	170	800	6.0	0.10
B72207S2131K101	S07K130E2	130	170	1750	12.5	0.25
B72210S2131K101	S10K130E2	130	170	3500	25.0	0.40
B72214S2131K101	S14K130E2	130	170	6000	50.0	0.60
B72220S2131K101	S20K130E2	130	170	10000	100.0	1.00
V <sub>RMS</sub> = 140 V						
B72205S2141K101	S05K140E2	140	180	800	6.5	0.10
B72207S2141K101	S07K140E2	140	180	1750	13.5	0.25
B72210S2141K101	S10K140E2	140	180	3500	27.5	0.40
B72214S2141K101	S14K140E2	140	180	6000	55.0	0.60
B72220S2141K101	S20K140E2	140	180	10000	110.0	1.00
V <sub>RMS</sub> = 150 V						
B72205S2151K101	S05K150E2	150	200	800	7.5	0.10
B72207S2151K101	S07K150E2	150	200	1750	15.0	0.25
B72210S2151K101	S10K150E2	150	200	3500	30.0	0.40
B72214S2151K101	S14K150E2	150	200	6000	60.0	0.60
B72220S2151K101	S20K150E2	150	200	10000	120.0	1.00
V <sub>RMS</sub> = 175 V						
B72205S2171K101	S05K175E2	175	225	800	8.0	0.10
B72207S2171K101	S07K175E2	175	225	1750	17.0	0.25
B72210S2171K101	S10K175E2	175	225	3500	35.0	0.40
B72214S2171K101	S14K175E2	175	225	6000	70.0	0.60
B72220S2171K101	S20K175E2	175	225	10000	135.0	1.00
V <sub>RMS</sub> = 210 V						
B72205S2211K101	S05K210E2	210	270	800	9.5	0.10
B72207S2211K101	S07K210E2	210	270	1750	20.0	0.25
B72210S2211K101	S10K210E2	210	270	3500	42.0	0.40
B72214S2211K101	S14K210E2	210	270	6000	80.0	0.60
B72220S2211K101	S20K210E2	210	270	10000	160.0	1.00
V <sub>RMS</sub> = 230 V						
B72205S2231K101	S05K230E2	230	300	800	11.0	0.10
B72207S2231K101	S07K230E2	230	300	1750	23.0	0.25
B72210S2231K101	S10K230E2	230	300	3500	45.0	0.40
B72214S2231K101	S14K230E2	230	300	6000	90.0	0.60
B72220S2231K101	S20K230E2	230	300	10000	180.0	1.00



B722\*



## Leaded varistors

## AdvanceD series

# Characteristics ( $T_A = 25$ °C)

Ordering code	V <sub>v</sub>	$\Delta V_{v}$	V <sub>c,max</sub>	i <sub>c</sub>	C <sub>typ</sub>
	(1 mA)	(1 mA)	(i <sub>c</sub> )		(1 kHz)
	V	%	V	Α	pF
V <sub>RMS</sub> = 130 V					
B72205S2131K101	205	±10	340	5.0	135
B72207S2131K101	205	±10	340	10.0	245
B72210S2131K101	205	±10	340	25.0	500
B72214S2131K101	205	±10	340	50.0	880
B72220S2131K101	205	±10	340	100.0	1850
$V_{RMS} = 140 \text{ V}$					
B72205S2141K101	220	±10	360	5.0	125
B72207S2141K101	220	±10	360	10.0	230
B72210S2141K101	220	±10	360	25.0	470
B72214S2141K101	220	±10	360	50.0	820
B72220S2141K101	220	±10	360	100.0	1700
$V_{RMS} = 150 \text{ V}$					_
B72205S2151K101	240	±10	395	5.0	115
B72207S2151K101	240	±10	395	10.0	210
B72210S2151K101	240	±10	395	25.0	430
B72214S2151K101	240	±10	395	50.0	750
B72220S2151K101	240	±10	395	100.0	1550
$V_{RMS} = 175 \text{ V}$		1	1		
B72205S2171K101	270	±10	455	5.0	100
B72207S2171K101	270	±10	455	10.0	190
B72210S2171K101	270	±10	455	25.0	380
B72214S2171K101	270	±10	455	50.0	670
B72220S2171K101	270	±10	455	100.0	1350
V <sub>RMS</sub> = 210 V					
B72205S2211K101	330	±10	545	5.0	75
B72207S2211K101	330	±10	545	10.0	140
B72210S2211K101	330	±10	545	25.0	290
B72214S2211K101	330	±10	545	50.0	580
B72220S2211K101	330	±10	545	100.0	1100
$V_{RMS} = 230 \text{ V}$		1	1		
B72205S2231K101	360	±10	595	5.0	70
B72207S2231K101	360	±10	595	10.0	130
B72210S2231K101	360	±10	595	25.0	265
B72214S2231K101	360	±10	595	50.0	530
B72220S2231K101	360	±10	595	100.0	1000



### AdvanceD series



# Electrical specifications and ordering codes Maximum ratings ( $T_A$ = 85 $^{\circ}$ C)

$ \begin{array}{c ccccc} & & & & & & & & & & & & & & & & &$						
V <sub>RMS</sub> = 250 V						
B72205S2251K101 S05K250E2 250 320 800 12.0 0.10						
B72207S2251K101 S07K250E2 250 320 1750 25.0 0.25						
B72210S2251K101 S10K250E2 250 320 3500 50.0 0.40						
B72214S2251K101 S14K250E2 250 320 6000 100.0 0.60						
B72220S2251K101						
V <sub>RMS</sub> = 275 V						
B72205S2271K101 S05K275E2 275 350 800 13.5 0.10						
B72207S2271K101 S07K275E2 275 350 1750 27.5 0.25						
B72210S2271K101 S10K275E2 275 350 3500 55.0 0.40						
B72214S2271K101 S14K275E2 275 350 6000 110.0 0.60						
B72220S2271K101 S20K275E2 275 350 10000 215.0 1.00						
$V_{RMS} = 300 \text{ V}$						
B72205S2301K101						
B72207S2301K101 S07K300E2 300 385 1750 30.0 0.25						
B72210S2301K101 S10K300E2 300 385 3500 60.0 0.40						
B72214S2301K101 S14K300E2 300 385 6000 125.0 0.60						
B72220S2301K101 S20K300E2 300 385 10000 250.0 1.00						
$V_{RMS} = 320 \text{ V}$						
B72207S2321K101 S07K320E2 320 420 1750 32.0 0.25						
B72210S2321K101 S10K320E2 320 420 3500 67.0 0.40						
B72214S2321K101 S14K320E2 320 420 6000 136.0 0.60						
B72220S2321K101 S20K320E2 320 420 10000 273.0 1.00						
$V_{RMS} = 385 \text{ V}$						
B72210S2381K101 S10K385E2 385 505 3500 67.0 0.40						
B72214S2381K101 S14K385E2 385 505 5000 136.0 0.60						
B72220S2381K101 S20K385E2 385 505 10000 273.0 1.00						
$V_{RMS} = 420 \text{ V}$						
B72210S2421K101 S10K420E2 420 560 3500 67.0 0.40						
B72214S2421K101 S14K420E2 420 560 5000 136.0 0.60						
B72220S2421K101 S20K420E2 420 560 10000 273.0 1.00						
V <sub>RMS</sub> = 460 V						
B72210S2461K101 S10K460E2 460 615 3500 70.0 0.40						
B72214S2461K101 S14K460E2 460 615 5000 150.0 0.60						
B72220S2461K101 S20K460E2 460 615 10000 300.0 1.00						



B722\*



## Leaded varistors

AdvanceD series

# Characteristics ( $T_A = 25$ °C)

Ordering code	$V_{v}$	$\Delta V_{v}$	V <sub>c,max</sub>	İc	C <sub>typ</sub>
	(1 mA)	(1 mA)	(i <sub>c</sub> )		(1 kHz)
	V	%	V	Α	pF
V <sub>RMS</sub> = 250 V					
B72205S2251K101	390	±10	650	5.0	65
B72207S2251K101	390	±10	650	10.0	120
B72210S2251K101	390	±10	650	25.0	245
B72214S2251K101	390	±10	650	50.0	490
B72220S2251K101	390	±10	650	100.0	940
V <sub>RMS</sub> = 275 V					
B72205S2271K101	430	±10	710	5.0	60
B72207S2271K101	430	±10	710	10.0	110
B72210S2271K101	430	±10	710	25.0	220
B72214S2271K101	430	±10	710	50.0	440
B72220S2271K101	430	±10	710	100.0	850
V <sub>RMS</sub> = 300 V					
B72205S2301K101	470	±10	775	5.0	55
B72207S2301K101	470	±10	775	10.0	100
B72210S2301K101	470	±10	775	25.0	200
B72214S2301K101	470	±10	775	50.0	400
B72220S2301K101	470	±10	775	100.0	780
$V_{RMS} = 320 \text{ V}$					
B72207S2321K101	510	±10	840	10.0	90
B72210S2321K101	510	±10	840	25.0	185
B72214S2321K101	510	±10	840	50.0	370
B72220S2321K101	510	±10	840	100.0	720
V <sub>RMS</sub> = 385 V					
B72210S2381K101	620	±10	1025	25.0	175
B72214S2381K101	620	±10	1025	50.0	315
B72220S2381K101	620	±10	1025	100.0	600
V <sub>RMS</sub> = 420 V					
B72210S2421K101	680	±10	1120	25.0	165
B72214S2421K101	680	±10	1120	50.0	290
B72220S2421K101	680	±10	1120	100.0	550
V <sub>RMS</sub> = 460 V					
B72210S2461K101	750	±10	1240	25.0	150
B72214S2461K101	750	±10	1240	50.0	260
B72220S2461K101	750	±10	1240	100.0	500
				·	



### AdvanceD series



# Electrical specifications and ordering codes Maximum ratings ( $T_A$ = 85 °C)

Ordering code	Туре	$V_{RMS}$	$V_{DC}$	i <sub>max</sub>	$W_{max}$	P <sub>max</sub>
-	(untaped)			(8/20 µs)	(2 ms)	
	SIOV-	V	V	Α	J	W
V <sub>RMS</sub> = 510 V						
B72210S2511K101	S10K510E2	510	670	3500	80.0	0.40
B72214S2511K101	S14K510E2	510	670	5000	165.0	0.60
B72220S2511K101	S20K510E2	510	670	10000	325.0	1.00
$V_{RMS} = 550 \text{ V}$						
B72210S2551K101	S10K550E2	550	745	3500	90.0	0.40
B72214S2551K101	S14K550E2	550	745	5000	180.0	0.60
B72220S2551K101	S20K550E2	550	745	10000	360.0	1.00
V <sub>RMS</sub> = 625 V						
B72210S2621K101	S10K625E2	625	825	3500	100.0	0.40
B72214S2621K101	S14K625E2	625	825	5000	200.0	0.60
B72220S2621K101	S20K625E2	625	825	10000	400.0	1.00
V <sub>RMS</sub> = 680 V						
B72210S2681K101	S10K680E2	680	895	3500	110.0	0.40
B72214S2681K101	S14K680E2	680	895	5000	220.0	0.60
B72220S2681K101	S20K680E2	680	895	10000	440.0	1.00





B722\*

# Characteristics ( $T_A = 25$ °C)

AdvanceD series


Ordering code	V <sub>v</sub>	$\Delta V_{v}$	V <sub>c,max</sub>	i <sub>c</sub>	$C_{typ}$
•	(1 mA)	(1 mA)	(i <sub>c</sub> )		(1 kHz)
	V	%	V	Α	pF
V <sub>RMS</sub> = 510 V					
B72210S2511K101	820	±10	1355	25.0	140
B72214S2511K101	820	±10	1355	50.0	240
B72220S2511K101	820	±10	1355	100.0	460
$V_{RMS} = 550 \text{ V}$					
B72210S2551K101	910	±10	1500	25.0	120
B72214S2551K101	910	±10	1500	50.0	215
B72220S2551K101	910	±10	1500	100.0	410
V <sub>RMS</sub> = 625 V					
B72210S2621K101	1000	±10	1650	25.0	110
B72214S2621K101	1000	±10	1650	50.0	200
B72220S2621K101	1000	±10	1650	100.0	380
V <sub>RMS</sub> = 680 V					
B72210S2681K101	1100	±10	1815	25.0	100
B72214S2681K101	1100	±10	1815	50.0	180
B72220S2681K101	1100	±10	1815	100.0	340



### AdvanceD series



### **Dimensional drawings**



1) Seating plane to IEC 60717

# Weight

Nominal diameter	V <sub>RMS</sub>	Weight
mm	V	g
5	130 300	0.4 0.5
7	130 320	0.6 0.8
10	130 680	1.2 2.8
14	130 680	1.8 4.8
20	130 680	3.3 9.6

The weight of varistors in between these voltage classes can be interpolated.

# VAR0408-C-E

### **Dimensions**

Ordering code	[e] ±1	a ±1	W <sub>max</sub>	th <sub>max</sub>	h <sub>max</sub>	I <sub>min</sub>	d ±0.05
	mm	mm	mm	mm	mm	mm	mm
V <sub>RMS</sub> = 130 V							
B72205S2131K101	5.0	1.6	7.0	3.9	8.5	25.0	0.6
B72207S2131K101	5.0	1.6	9.0	3.9	11.0	25.0	0.6
B72210S2131K101	7.5	1.8	12.0	4.5	14.5	25.0	0.8
B72214S2131K101	7.5	1.9	15.5	4.6	18.5	25.0	0.8
B72220S2131K101	10.0	2.0	21.5	5.0	25.5	25.0	1.0
V <sub>RMS</sub> = 140 V							
B72205S2141K101	5.0	1.7	7.0	4.0	8.5	25.0	0.6
B72207S2141K101	5.0	1.7	9.0	4.0	11.0	25.0	0.6
B72210S2141K101	7.5	1.9	12.0	4.6	14.5	25.0	0.8
B72214S2141K101	7.5	2.0	15.5	4.7	18.5	25.0	0.8
B72220S2141K101	10.0	2.1	21.5	5.1	25.5	25.0	1.0
V <sub>RMS</sub> = 150 V							
B72205S2151K101	5.0	1.8	7.0	4.1	8.5	25.0	0.6
B72207S2151K101	5.0	1.8	9.0	4.1	11.0	25.0	0.6
B72210S2151K101	7.5	2.0	12.0	4.7	14.5	25.0	0.8
B72214S2151K101	7.5	2.1	15.5	4.8	18.5	25.0	0.8
B72220S2151K101	10.0	2.2	21.5	5.2	25.5	25.0	1.0
V <sub>RMS</sub> = 175 V							
B72205S2171K101	5.0	2.0	7.0	4.3	8.5	25.0	0.6
B72207S2171K101	5.0	2.0	9.0	4.3	11.0	25.0	0.6
B72210S2171K101	7.5	2.2	12.0	4.9	14.5	25.0	0.8
B72214S2171K101	7.5	2.2	15.5	4.9	18.5	25.0	0.8
B72220S2171K101	10.0	2.3	21.5	5.3	25.5	25.0	1.0



B722<sup>9</sup>



#### Leaded varistors

#### AdvanceD series

W<sub>max</sub> h<sub>max</sub> d ±0.05 Ordering code [e] ±1 a ±1 thmax I<sub>min</sub> mm mm mm mm mm mm mm  $V_{RMS} = 210 \text{ V}$ B72205S2211K101 5.0 1.7 7.0 4.2 8.5 25.0 0.6 B72207S2211K101 5.0 1.7 9.0 4.2 11.0 25.0 0.6 B72210S2211K101 7.5 1.9 12.0 5.0 14.5 25.0 8.0 B72214S2211K101 7.5 1.9 15.5 5.0 25.0 18.5 0.8 10.0 2.2 B72220S2211K101 21.5 5.4 25.5 25.0 1.0  $V_{RMS} = 230 \text{ V}$ B72205S2231K101 5.0 1.8 7.0 4.4 8.5 25.0 0.6 B72207S2231K101 5.0 1.8 9.0 4.4 11.0 25.0 0.6 2.0 5.0 14.5 B72210S2231K101 7.5 12.0 25.0 8.0 2.0 5.1 B72214S2231K101 7.5 15.5 18.5 25.0 8.0 B72220S2231K101 10.0 2.3 21.5 5.5 25.5 25.0 1.0  $V_{RMS} = 250 \text{ V}$ B72205S2251K101 5.0 1.9 7.0 4.5 8.5 25.0 0.6 B72207S2251K101 5.0 1.9 9.0 4.5 11.0 25.0 0.6 2.1 5.2 B72210S2251K101 7.5 12.0 14.5 25.0 8.0 2.1 B72214S2251K101 7.5 15.5 5.2 18.5 25.0 8.0 B72220S2251K101 10.0 2.4 21.5 5.7 25.5 25.0 1.0  $V_{RMS} = 275 \text{ V}$ B72205S2271K101 5.0 2.0 7.0 4.6 8.5 25.0 0.6 2.0 4.6 25.0 B72207S2271K101 5.0 9.0 11.0 0.6 7.5 2.2 5.4 B72210S2271K101 12.0 14.5 25.0 8.0 B72214S2271K101 7.5 2.2 15.5 5.4 18.5 25.0 8.0 25.5 B72220S2271K101 10.0 2.6 21.5 5.8 25.0 1.0  $V_{BMS} = 300 \text{ V}$ B72205S2301K101 5.0 2.1 7.0 4.7 8.5 25.0 0.6 B72207S2301K101 5.0 2.1 4.7 11.0 25.0 0.6 9.0 B72210S2301K101 7.5 2.3 12.0 5.6 14.5 25.0 8.0 2.3 B72214S2301K101 7.5 15.5 5.6 18.5 25.0 8.0 2.8 B72220S2301K101 10.0 21.5 6.1 25.5 25.0 1.0  $V_{RMS} = 320 \text{ V}$ B72207S2321K101 5.0 2.3 9.0 4.6 11.0 25.0 0.6 B72210S2321K101 7.5 2.4 12.0 5.8 15.0 25.0 8.0 B72214S2321K101 7.5 2.4 15.5 5.8 19.0 25.0 8.0 B72220S2321K101 10.0 2.9 21.5 6.2 25.5 25.0 1.0  $V_{RMS} = 385 \text{ V}$ 7.1 B72210S2381K101 7.5 3.3 12.0 15.0 25.0 0.8 B72214S2381K101 7.5 3.4 15.5 7.1 19.0 25.0 8.0

10.0

3.9

B72220S2381K101

7.6

26.0

25.0

1.0

21.5



### AdvanceD series



Ordering code	[e] ±1	a ±1	W <sub>max</sub>	th <sub>max</sub>	h <sub>max</sub>	I <sub>min</sub>	d ±0.05	
•	mm	mm	mm	mm	mm	mm	mm	
V <sub>RMS</sub> = 420 V	V <sub>RMS</sub> = 420 V							
B72210S2421K101	7.5	3.5	12.0	7.4	15.0	25.0	0.8	
B72214S2421K101	7.5	3.6	15.5	7.5	19.0	25.0	0.8	
B72220S2421K101	10.0	4.2	21.5	7.9	26.0	25.0	1.0	
$V_{RMS} = 460 \text{ V}$								
B72210S2461K101	7.5	3.7	12.0	7.7	15.0	25.0	0.8	
B72214S2461K101	7.5	3.8	15.5	7.8	19.0	25.0	0.8	
B72220S2461K101	10.0	4.5	21.5	8.2	26.0	25.0	1.0	
V <sub>RMS</sub> = 510 V								
B72210S2511K101	7.5	4.0	12.0	8.0	15.0	25.0	0.8	
B72214S2511K101	7.5	4.0	15.5	8.1	19.0	25.0	0.8	
B72220S2511K101	10.0	4.6	21.5	8.6	26.0	25.0	1.0	
$V_{RMS} = 550 \text{ V}$								
B72210S2551K101	7.5	4.3	12.0	8.4	15.0	25.0	0.8	
B72214S2551K101	7.5	4.7	15.5	8.5	19.0	25.0	0.8	
B72220S2551K101	10.0	4.8	21.5	9.0	26.0	25.0	1.0	
V <sub>RMS</sub> = 625 V								
B72210S2621K101	7.5	5.0	12.0	8.8	15.0	25.0	0.8	
B72214S2621K101	7.5	5.1	15.5	8.9	19.0	25.0	0.8	
B72220S2621K101	10.0	5.4	21.5	9.4	26.0	25.0	1.0	
V <sub>RMS</sub> = 680 V								
B72210S2681K101	7.5	5.4	12.0	9.2	15.0	25.0	0.8	
B72214S2681K101	7.5	5.5	15.5	9.3	19.0	25.0	0.8	
B72220S2681K101	10.0	5.8	21.5	9.8	26.0	25.0	1.0	



B722\*



# Leaded varistors

### AdvanceD series

## Reliability data

Test	Test methods/conditions	Requirement
Varistor voltage	The voltage between two terminals with the specified measuring current applied is called $V_V$ (1 mA <sub>DC</sub> @ 0.2 2 s).	To meet the specified value
Clamping voltage	The maximum voltage between two terminals with the specified standard impulse current (8/20 µs) applied.	To meet the specified value
Endurance at upper category temperature	1000 h at UCT  After having continuously applied the maximum allowable AC voltage at UCT ±2 °C for 1000 h, the specimen shall be stored at room temperature and normal humidity for 1 to 2 h.  Thereafter, the change of V <sub>V</sub> shall be measured.	IΔV/V (1 mA)I ≤10%
Surge current derating, 8/20 μs	10 surge currents (8/20 μs), unipolar, interval 30 s, amplitude corresponding to derating curve for 10 impulses at 20 μs	∆V/V (1 mA)  ≤10% (measured in direction of surge current) No visible damage
Surge current derating, 2 ms	10 surge currents (2 ms), unipolar, interval 120 s, amplitude corresponding to derating curve for 10 impulses at 2 ms	I∆V/V (1 mA)I ≤10% (measured in direction of surge current) No visible damage
Electric strength	IEC 61051-1, test 4.9.2  Metal balls method, 2500 V <sub>RMS</sub> , 60 s  The varistor is placed in a container holding 1.6 ±0.2 mm diameter metal balls such that only the terminations of the varistor are protruding.  The specified voltage shall be applied between both terminals of the specimen connected together and the electrode inserted between the metal balls.	No breakdown



# Leaded varistors B722\* AdvanceD series



Test	Test methods/conditions	Requirement		
Climatic sequence	The specimen shall be subjected to: a) dry heat at UCT, 16 h, IEC 60068-2-2, test Ba b) damp heat, 1st cycle: 55 °C, 93% r. H., 24 h, IEC 60068-2-30, test Db c) cold, LCT, 2 h, IEC 60068-2-1, test Aa d) damp heat, additional 5 cycles: 55 °C/25 °C, 93% r. H., 24 h/cycle, IEC 60068-2-30, test Db.	$ \Delta V/V$ (1 mA) $ $ ≤10% $		
	Then the specimen shall be stored at room temperature and normal humidity for 1 to 2 h. Thereafter, the change of $V_{\rm V}$ shall be measured. Thereafter, insulation resistance $R_{\rm ins}$ shall be measured at $V=500~V$ .			
Rapid change of temperature	IEC 60068-2-14, test Na, LCT/UCT, dwell time 30 min, 5 cycles	l∆V/V (1 mA)l ≤5% No visible damage		
Damp heat, steady state	IEC 60068-2-78, test Ca  The specimen shall be subjected to $40\pm2$ °C, 90 to 95% r. H. for 56 days without load / with 10% of the maximum continuous DC operating voltage $V_{DC}$ . Then stored at room temperature and normal humidity for 1 to 2 h. Thereafter, the change of $V_V$ shall be measured. Thereafter, insulation resistance $R_{ins}$ shall be measured at $V = 500 V$ (insulated varistors only).	$I\Delta V/V$ (1 mA) $I$ ≤10% $R_{ins}$ ≥100 MΩ		



B722



#### Leaded varistors

#### AdvanceD series

Test Test methods/conditions Requirement Solderability IEC 60068-2-20, test Ta. The inspection shall be carried out under adequate method 1 with modified conditions for light with normal evesight or lead-free solder alloys: 245 °C. 3 s: with the assistance of a After dipping the terminals to a depth of magnifier capable of giving approximately 3 mm from the body in a a magnification of 4 to soldering bath of 245 °C for 3 s. the 10 times. The dipped terminals shall be visually examined. surface shall be covered with a smooth and bright solder coating with no more than small amounts of scattered imperfections such as pinholes or un-wetted or de-wetted areas. These imperfections shall not be concentrated in one area. Resistance to soldering IEC 60068-2-20, test Tb, method 1A,  $|\Delta V/V (1 \text{ mA})| \leq 5\%$ 260 °C, 10 s: heat No visible damage Each lead shall be dipped into a solder bath having a temperature of 260 ±5 °C to a point 2.0 to 2.5 mm from the body of the specimen, be held there for 10  $\pm$ 1 s and then be stored at room temperature and normal humidity for 1 to 2 h. The change of V<sub>V</sub> shall be measured and the specimen shall be visually examined. Tensile strength IEC 60068-2-21, test Ua1 |ΔV/V (1 mA)| ≤5% After gradually applying the force No break of solder joint, specified below and keeping the unit no wire break fixed for 10 s. the terminal shall be visually examined for any damage. Force for wire diameter: 0.6 mm = 10 N0.8 mm = 10 N1.0 mm = 20 N







Test	Test methods/conditions	Requirement
Vibration	IEC 60068-2-6, test Fc, method B4	∆V/V (1 mA)  ≤5%
	Frequency range: $10 \dots 55 \text{ Hz}$ Amplitude: $0.75 \text{ mm}$ or $98 \text{ m/s}^2$ Duration: $6 \text{ h} (3 \cdot 2 \text{ h})$ Pulse: sine wave After repeatedly applying a single harmonic vibration according to the table above. The change of $V_V$ shall be measured and the specimen shall be visually examined.	No visible damage
Bump	IEC 60068-2-29, test Eb Pulse duration: 6 ms Max. acceleration: 400 m/s² Number of bumps: 4000 Pulse: half sine	I∆V/V (1 mA)I ≤5% No visible damage
Fire hazard	IEC 60695-11-5 (needle flame test) Severity: vertical 10 s	5 s max.

#### Note:

UCT = Upper category temperature LCT = Lower category temperature

 $R_{ins}$  = Insulation resistance






#### AdvanceD series


B722<sup>9</sup>

#### v/i characteristics

v = f(i) - for explanation of the characteristics refer to "General technical information", 1.6.3 A = Leakage current, B = Protection level } for worst-case varistor tolerances

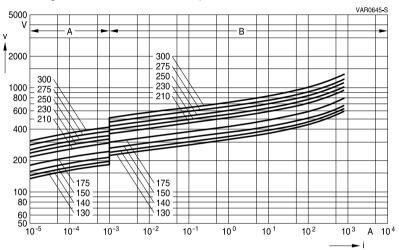

SIOV-S05 ... E2

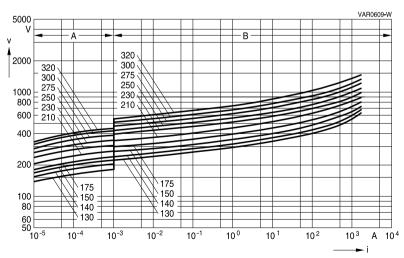

SIOV-S07 ... E2




#### AdvanceD series




#### v/i characteristics

v = f(i) - for explanation of the characteristics refer to "General technical information", 1.6.3 A = Leakage current, B = Protection level } for worst-case varistor tolerances

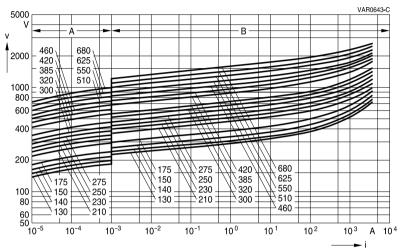

SIOV-S10 ... E2

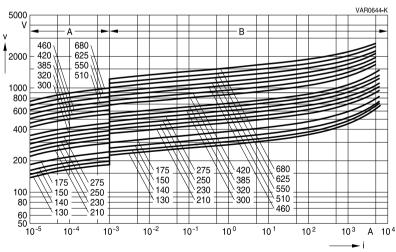

SIOV-S14 ... E2






# Leaded varistors AdvanceD series

B722

#### v/i characteristics

v = f (i) - for explanation of the characteristics refer to "General technical information", 1.6.3 A = Leakage current, B = Protection level } for worst-case varistor tolerances

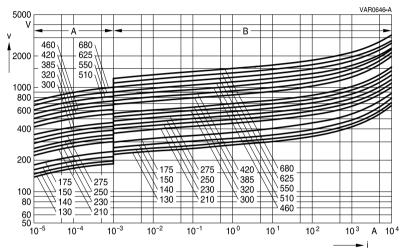

SIOV-S20 ... E2



Leaded varistors B722<sup>st</sup>


#### AdvanceD series




### **Derating curves**

Maximum surge current  $i_{max} = f(t_r, pulse train)$ 

For explanation of the derating curves refer to "General technical information", section 1.8.1

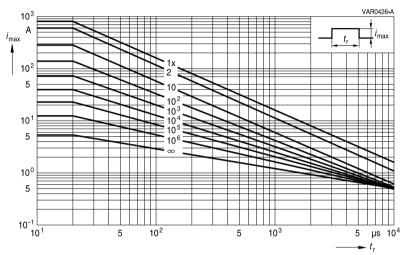

### SIOV-S05K130 ... K300E2

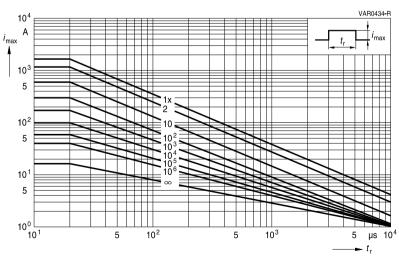

SIOV-S07K130 ... K320E2






AdvanceD series

B722


### **Derating curves**

Maximum surge current  $i_{max} = f(t_r, pulse train)$ 

For explanation of the derating curves refer to "General technical information", section 1.8.1

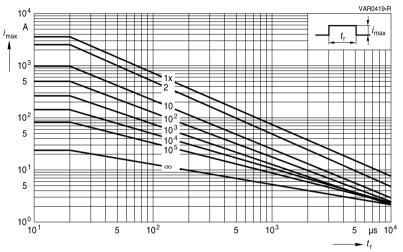

### SIOV-S10K130 ... K320E2

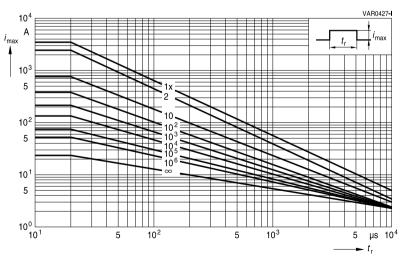

SIOV-S10K385 ... K680E2



Leaded varistors B722<sup>st</sup>


#### AdvanceD series




### **Derating curves**

Maximum surge current  $i_{max} = f(t_r, pulse train)$ 

For explanation of the derating curves refer to "General technical information", section 1.8.1

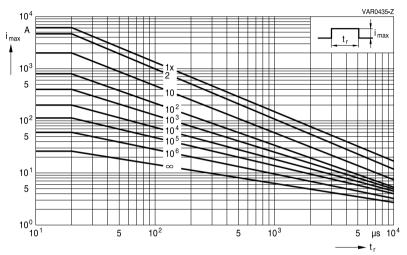

SIOV-S14K130 ... K320E2

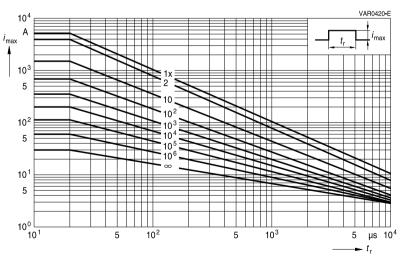

SIOV-S14K385 ... K680E2






AdvanceD series

B722


### **Derating curves**

Maximum surge current  $i_{max} = f(t_r, pulse train)$ 

For explanation of the derating curves refer to "General technical information", section 1.8.1

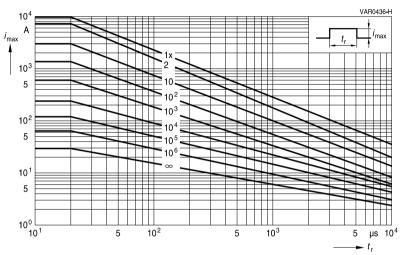

### SIOV-S20K130 ... K320E2

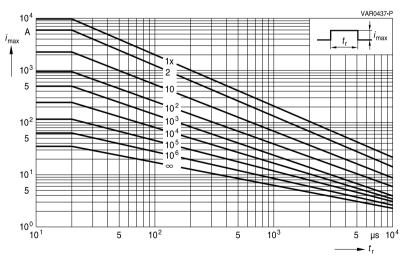

SIOV-S20K385 ... K680E2






#### AdvanceD series



### Taping, packaging and lead configuration

### 1 EPCOS ordering code system

#### For leaded varistors

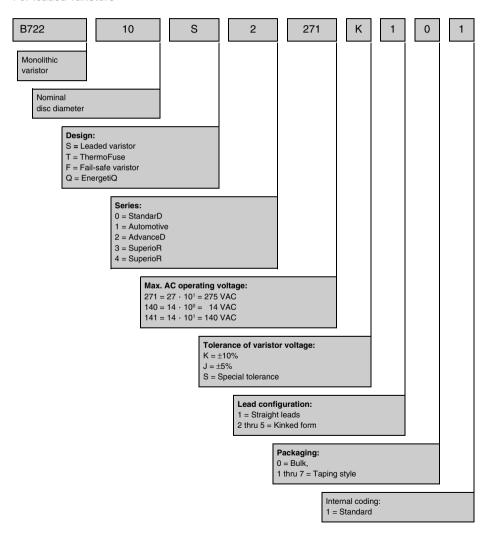






B722 AdvanceD series


#### 2 Taping and packaging of leaded varistors

Tape packaging for lead spacing @ = 5 fully conforms to IEC 60286-2, while for lead spacings e = 7.5 and 10 the taping mode is based on this standard.

#### 2.1 Taping in accordance with IEC 60286-2 for lead spacing 5.0 mm

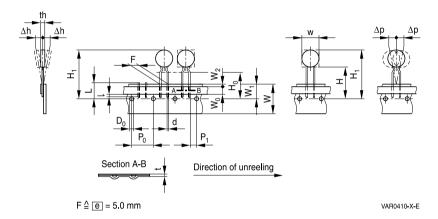

#### 2.2 Taping based on IEC 60286-2 for lead spacing 7.5 and 10 mm

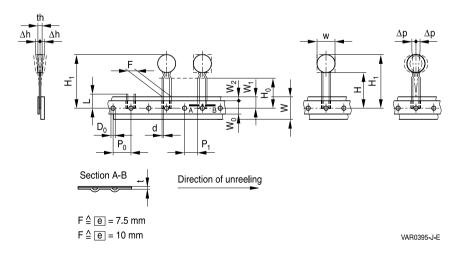



### AdvanceD series



#### Tape dimensions (in mm) 2.3

Sym-	<i>e</i> = 5.0	Tolerance	<i>e</i> = 7.5	Tolerance	e = 10.0	Tolerance	Remarks
bol							
W		max.		max.		max.	see tables in
							each series
th		max.		max.		max.	under
							"Dimensions"
d	0.6	±0.05	0.8	±0.05	1.0	±0.05	
$P_0$	12.7	±0.3	12.71)	±0.3	12.7	±0.3	±1 mm/20
							sprocket holes
P <sub>1</sub>	3.85	±0.7	8.95	±0.8	7.7	±0.8	
F	5.0	+0.6/-0.1	7.5	±0.8	10.0	±0.8	
$\Delta h$	0	±2.0	depends of	n s	depends on	S	measured at
$\Delta p$	0	±1.3	0	±2.0	0	±2.0	top of compo-
							nent body
W	18.0	±0.5	18.0	±0.5	18.0	±0.5	
$W_0$	5.5	min.	11.0	min.	11.0	min.	Peel-off
							force ≥ 5 N
$W_1$	9.0	±0.5	9.0	+0.75/-0.5	9.0	+0.75/-0.5	
$W_2$	3.0	max.	3.0	max.	3.0	max.	
Н	18.0	+2.0/-0	18.0	+2.0/-0	18.0	+2.0/-0	2)
$H_0$	16.0	±0.5	16.0	±0.5	16.0	±0.5	3)
	(18.0)		(18.0)				
$H_1$	32.2	max.	45.0	max.	45.0	max.	
$\overline{D_0}$	4.0	±0.2	4.0	±0.2	4.0	±0.2	
t	0.9	max.	0.9	max.	0.9	max.	without lead
L	11.0	max.	11.0	max.	11.0	max.	
1	4.0	max.					

<sup>1)</sup> Taping with  $P_0 = 15.0$  mm upon request

 <sup>2)</sup> Applies only to uncrimped types
 3) Applies only to crimped types (H<sub>0</sub> = 18 upon request)





B722\* AdvanceD series

#### Taping mode 2.4

Example: B72210S0271K1 5 1

Digit 14


Digit 14	Taping	Reel type	Seating plane height H <sub>0</sub>	Seating plane height H	Pitch distance
	mode		for crimped types	for uncrimped types	$P_0$
			mm	mm	mm
0	_	Bulk	-	_	_
1	G	1	16	18	12.7
2	G2	I	18	_	12.7
3	G3	II	16	18	12.7
4	G4	II	18	_	12.7
5	G5	Ш	16	18	12.7
6	GA	Ammo pack	16	18	12.7
7	G2A	Ammo pack	18	_	12.7
Internal	coding fo	r special tapin	g		
	G6	Ш	18	_	12.7
	G10	II	16	18	15.0
	G11	II	18	_	15.0
	G10A	Ammo pack	16	18	15.0
	G11A	Ammo pack	18	_	15.0




Leaded varistors	B722*
AdvanceD series	



#### 2.5 Reel dimension






#### Dimensions (in mm)

Reel type	d	f	n	w
I	360 max.	31 ±1	approx. 45	54 max.
II	360 max.	31 ±1	approx. 55	64 max.
III	500 max.	23 ±1	approx. 59	72 max.

If reel type III is not compatible with insertion equipment because of its large diameter, nominal disk diameter 10 mm and 14 mm can be supplied on reel II upon request (taping mode G3).

### 2.6 Ammo pack dimensions

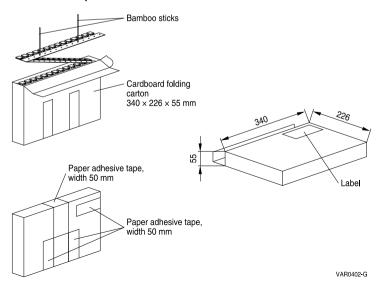





AdvanceD series

B722

#### 3 Lead configuration

Straight leads are standard for disk varistors. Other lead configurations as crimp style or customer-specific lead wire length according to 3.1, 3.2, 3.3 and 3.4 are optional. Crimped leads (non-standard) are differently crimped for technical reasons; the individual crimp styles are denoted by consecutive numbers (S, S2 through S5) as shown in the dimensional drawings below.

The crimp styles of the individual types can be seen from the type designation in the ordering tables.

#### 3.1 Crimp style mode

Example: B72210S0271K 5 01

Digit 13

Digit 13 of ordering code	Crimp style	Figure
1	Standard, straight leads	1
2	S2	2
3	S3	3
4	S4	4
5	S5	5
Available upon request		
Internal coding	_	6

### 3.2 Standard leads and non-standard crimp styles

#### Standard, straight leads





Figure 1

# Non-standard, crimp style S2




1) Seating plane to IEC 60717

VAR0411-F-E

Figure 2

### Non-standard, crimp style S3



1) Seating plane to IEC 60717 VAR0396-R-E


Figure 3



#### AdvanceD series




### Non-standard, crimp style S4



1) Seating plane to IEC 60717 VAR0404-W-E

### Non-standard, crimp style S5



1) Seating plane to IEC 60717 VAR0412-N-E

Figure 4

Figure 5

## 3.3 Component height (h<sub>max</sub>) for crimped versions (non-standard)

Due to technical reasons the component height  $(h_{max})$  increases if a crimp is added. The maximum height of the crimped component can be found in the table below.

Nominal diameter	V <sub>RMS</sub>	Crimp style	е	h <sub>max</sub>
mm	V		mm	mm
5	11 175	S2	5.0	10.0
5	210 460	S3	5.0	10.0
7	11 175	S2	5.0	12.0
7	210 460	S3	5.0	12.0
10	11 300	S5	7.5	15.5
10	320 460	S3/S5	7.5	16.5
10	510	S3/S5	7.5	17.5
10	Automotive	S5	7.5	17.0
10	Automotive (D1 types)	S5	7.5	16.0
10	11 175	S4	5.0	16.5
10	210 460	S3	5.0	16.5
1.4	11 200	C.F.	7.5	20.0
14	11 300	S5	7.5	20.0
14	320 460	S3/S5	7.5	20.0
14	510	S3/S5	7.5	21.5
14	Automotive	S5	7.5	21.0
14	Automotive (D1 types)	S5	7.5	20.0
20	11 320	S5	10.0	27.0
20	385 510	S5	10.0	27.5
20	000 010	00	10.0	21.0



B722<sup>9</sup>



### Leaded varistors


AdvanceD series

#### 3.4 Trimmed leads (non-standard)

Varistors with cut leads available upon request.

Lead length tolerances:

Straight leads +/-1.0 mm +/-0.8 mm Crimped leads Minimum lead length 3.5 mm



- Seating plane to IEC 60717
   For round component head
   For EnergetiQ series, square component head VAR0642-U-E

Figure 6



#### AdvanceD series



#### Cautions and warnings

#### General

- EPCOS metal oxide varistors are designed for specific applications and should not be used for purposes not identified in our specifications, application notes and data books unless otherwise agreed with EPCOS during the design-in-phase.
- Ensure suitability of SIOVs through reliability testing during the design-in phase. SIOVs should be evaluated taking into consideration worst-case conditions.
- 3. For applications of SIOVs in line-to-ground circuits based on various international and local standards there are restrictions existing or additional safety measures required.

#### Storage

- 1. Store SIOVs only in original packaging. Do not open the package prior to processing.
- 2. Storage conditions in original packaging:

Storage temperature: -25 °C ... +45 °C,

Relative humidity: <75% annual average,

<95% on maximum 30 days a year.

Dew precipitation: is to be avoided.

- 3. Avoid contamination of an SIOV's during storage, handling and processing.
- 4. Avoid storage of SIOVs in harmful environments that can affect the function during long-term operation (examples given under operation precautions).
- 5. The SIOV type series should be soldered within the time specified:

SIOV-S, -Q, -LS, -B, -SFS 24 months ETFV and T series 12 months.

#### Handling

- 1. SIOVs must not be dropped.
- 2. Components must not be touched with bare hands. Gloves are recommended.
- Avoid contamination of the surface of SIOV electrodes during handling, be careful of the sharp edge of SIOV electrodes.

#### Soldering (where applicable)

- 1. Use rosin-type flux or non-activated flux.
- 2. Insufficient preheating may cause ceramic cracks.
- 3. Rapid cooling by dipping in solvent is not recommended.
- 4. Complete removal of flux is recommended.
- 5. Temperatures of all preheat stages and the solder bath must be strictly controlled especially for T series (T14 and T20).





# Leaded varistors AdvanceD series

B722\*

#### Mounting

- 1. Potting, sealing or adhesive compounds can produce chemical reactions in the SIOV ceramic that will degrade the component's electrical characteristics.
- 2. Overloading SIOVs may result in ruptured packages and expulsion of hot materials. For this reason SIOVs should be physically shielded from adjacent components.

#### Operation

- 1. Use SIOVs only within the specified temperature operating range.
- 2. Use SIOVs only within the specified voltage and current ranges.
- Environmental conditions must not harm SIOVs. Use SIOVs only in normal atmospheric conditions. Avoid use in deoxidizing gases (chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas etc), corrosive agents, humid or salty conditions. Contact with any liquids and solvents should be prevented.

#### Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under www.epcos.com/orderingcodes



# Leaded varistors B722 AdvanceD series



### Symbols and terms

Symbol	Term
С	Capacitance
$C_{typ}$	Typical capacitance
i	Current
i <sub>c</sub>	Current at which V <sub>c, max</sub> is measured
I <sub>leak</sub>	Leakage current
i <sub>max</sub>	Maximum surge current (also termed peak current)
I <sub>max</sub>	Maximum discharge current
In	Nominal discharge current
LCT	Lower category temperature
$L_{typ}$	Typical inductance
$P_{max}$	Maximum average power dissipation
R <sub>ins</sub>	Insulation resistance
$R_{min}$	Minimum resistance
$T_A$	Ambient temperature
t <sub>r</sub>	Duration of equivalent rectangular wave
UCT	Upper category temperature
V	Voltage
$V_{clamp}$	Clamping voltage
V <sub>c, max</sub>	Maximum clamping voltage at specified current i <sub>c</sub>
$V_{DC}$	DC operating voltage
$V_{\text{jump}}$	Maximum jump start voltage
$V_{max}$	Maximum voltage
$V_{op}$	Operating voltage
$V_{RMS}$	AC operating voltage, root-mean-square value
$V_{RMS,\;op,\;max}$	Root-mean-square value of max. DC operating voltage incl. ripple current
$V_{\text{surge}}$	Super imposed surge voltage
$V_{V}$	Varistor voltage
$\Delta V_{V}$	Tolerance of varistor voltage
$W_{LD}$	Maximum load dump
$W_{\text{max}}$	Maximum energy absorption
e	Lead spacing

All dimensions are given in mm.

The commas used in numerical values denote decimal points.



#### Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed guestions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).



#### Important notes

7. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.